MODULAR LIGHTING — INSTRUMENTS

Date	
Customer	
Project	
Type	

Thimble Recessed Trimless Adjustable 70 1x LED 2700K Medium DE Bronze Brushed Anodised

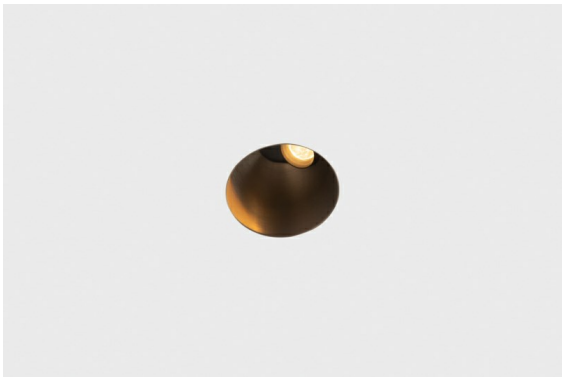



Minimalistic design, subtle curves, revealing colours, high-quality lens and LED. With its deep-recessed and glare-free light source, Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlighter brings pure form, definition and quality light without stealing all the attention.

Specifications

Material	11623082	
Light Source Type	LED	
LED Type	BRIDGELUX V6 HD G7	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K	
Lifetime	L80B20 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	1	
CIE flux code	100 100 100 100 61	
Binning (SDCM)	2	
Light Direction	Down	
Optic	Lens	
Measured beam angle (°)	30.0	
Input Voltage	Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Ceiling	
Mounting	Recessed	
Cut-out size (mm)	ø86 for plastered concrete ceilings, ø105 for false ceilings	
Mounting depth (mm)	110.0	
Adjustability	H 360° V 30°	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Bronze, Brushed Anodised	
Gross weight (g)	199.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	14,8	15,2
Max. forward voltage (Vf)	18,0	18,6
Connected load (W)	5,7	8,5
Delivered lumens (lm)	438	591
Efficacy (lm/W)	77	70
Glare rating	1	1
Remark	• 4000K on request	

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2024-01-04, 03:22:21 PM - ©Modular Lighting Instruments

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2024-01-04, 03:22:21 PM - ©Modular Lighting Instruments

TM30 & CRI diagram

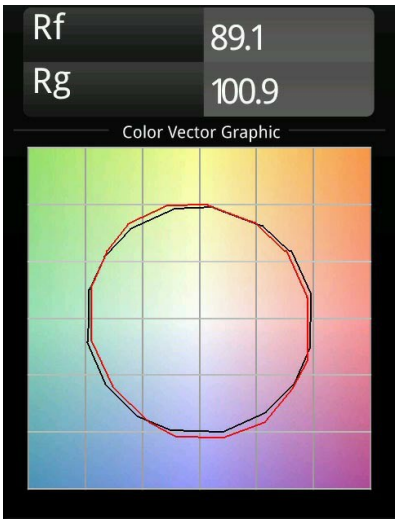

Light distribution & beam diagram

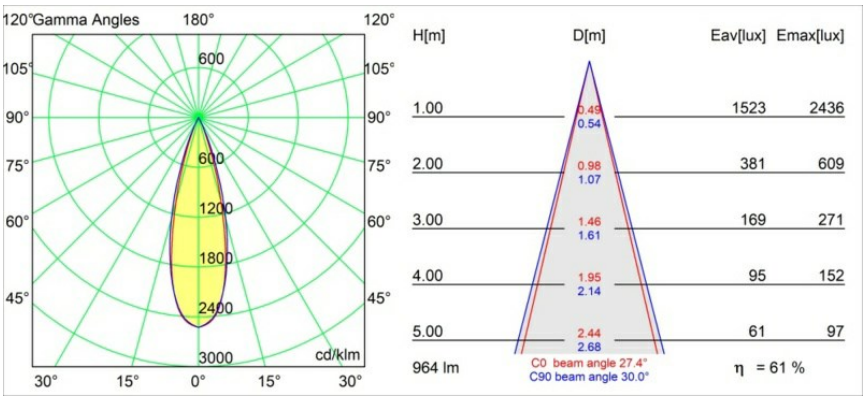

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2024-01-04, 03:22:21 PM - ©Modular Lighting Instruments

Installation Accessories



11624230 Concrete kit 150x150 - Ø70



11624430 Concrete ring Ø70 for standard concrete boxes



11624130 Conbox 140x400x100x210



11624030 Conbox 140x250x100x210



12292630 Gypsum fibreboard 150x150

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2024-01-04, 03:22:21 PM - ©Modular Lighting Instruments



12292730 Gypsum fibreboard 300x150



11624530 Ring Recessed Trimless 70

Choose a required accessory

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2024-01-04, 03:22:21 PM - ©Modular Lighting Instruments