


7212/40 Pillar LED wall light, 40/7cm

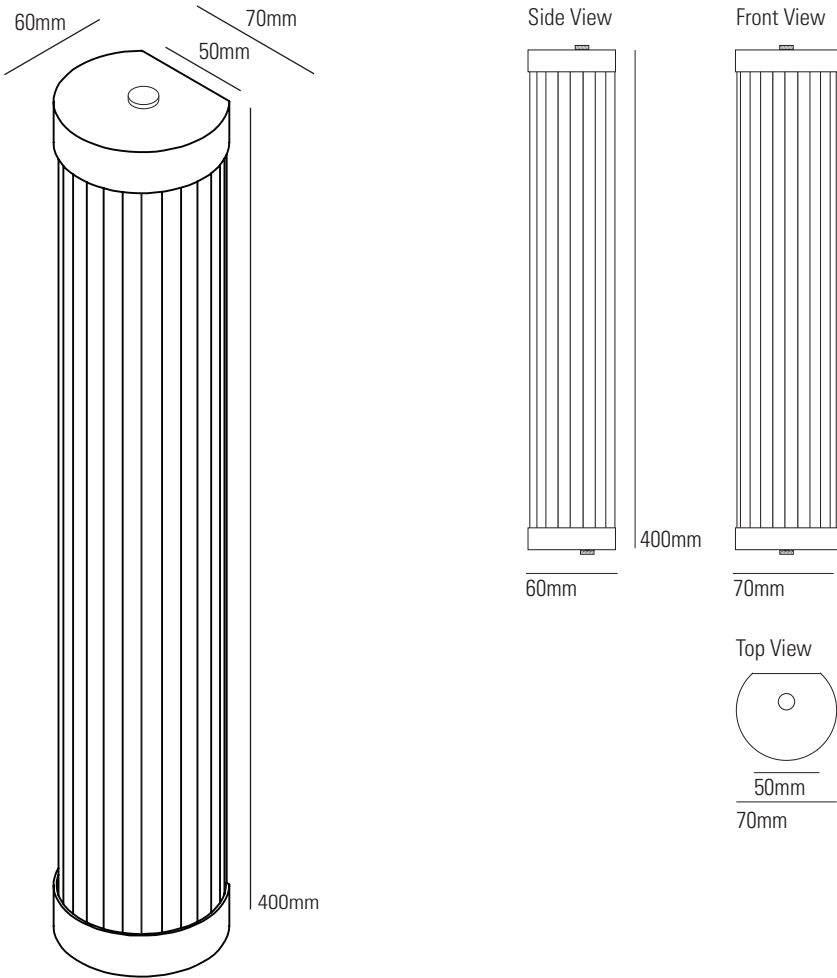


Specifications

| | | | |
|---------------|---------------------|-------------------|---|
| PRODUCT CODE: | DP7212/40 | IP RATING: | IP44 |
| MAX WATTAGE: | 4.5W | MATERIAL(S): | BRASS, GLASS |
| VOLTAGE: | 12V (DC) | AVAILABLE FINISH: | WEATHERED OR POLISHED BRASS/CHROME PLATE |
| BULB TYPE: | LED TUBE (SUPPLIED) | | |

Supplied with integral LED and driver (for remote installation up to 10 meters from the fitting*)
Fitting is dimmable and is supplied with a TRIAC dimming leading edge driver **
Warm white tone LED (2700K)
*Assuming minimum cable gauge is 1.5mm (16AWG)
**Dimming performance may vary between manufacturers, check minimum load and compatibility against dimmer specification.

IMPORTANT:
LOW VOLTAGE LED FITTING
CONNECTION TO REMOTE DRIVER (SUPPLIED)
REQUIRED FOR MAINS INSTALLATION

7212/40 BACKPLATE: Pillar LED wall light, 40/7cm

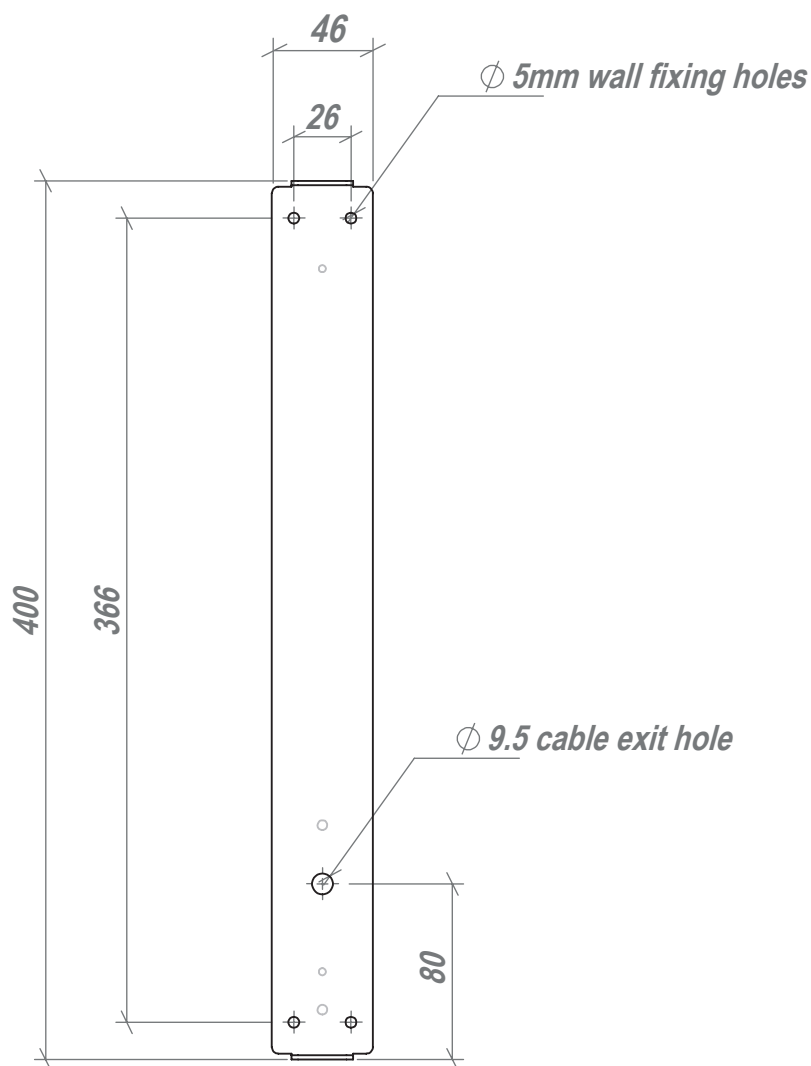

Backplates can be rotated 180 degrees- to allow cable exit to be positioned at top if required.

Stated dimensions are for reference purposes only. Due to manufacturing tolerances, the actual dimensions of each product may differ to those stated.