MODULAR LIGHTING — INSTRUMENTS

| | |
|---|---|
| Date | |
| Customer | |
| Project | |
| Type | |

*Minude Track 48V Adjustable 45 1x LED 2700K Medium 1-10V DI Bronze Brushed Anodised*




Minude's yogic flexibility will surprise you about as much as its bare, cylindrical design. Express a refined and minimalistic look & feel on walls, on high or low ceilings. Try more than one Minude on our Pista track or on our redesigned Modupoint LED. Its long string of colours and miniature size will make a big impression.

## Specifications

| | |
|---|---|
| Material | 11460082 |
| Light Source Type | LED |
| LED Type | BRIDGELUX V6 HD G7 |
| LED technology | LED COB |
| CRI | Min. 90 |
| Colour Temperature | 2700K |
| Lifetime | L80B20 @50,000 Hours |
| Lamp Included | Yes |
| Number of Light Sources | 1 |
| CIE flux code | 100 100 100 100 69 |
| Binning (SDCM) | 2 |
| Light Direction | Down |
| Optic | Lens |
| Measured beam angle (°) | 29.2 |
| Input Voltage | 48Vdc |
| Luminaire power (W) | 11.0 |
| Electrical Class | III |
| IP Rating | 20 |
| Glow wire rating (°C) | 960 |
| Dimming Protocol | 1-10V |
| Indoor/Outdoor | Indoor |
| Application | Ceiling, Wall |
| Adjustability | H 360° V 0°/+90° |
| Distance to Lighted Object (m) | 0,1 |
| Primary Colour & Primary Finish | Bronze, Brushed Anodised |
| Gross weight (g) | 375.0 |
| Delivered lumens (lm) | 595 |
| Efficacy (lm/W) | 54 |
| Glare rating | 1 |
| Remark | • 3500K and 4000K on request<br>• This Track 48V luminaire comes with a black track adapter. A white track adapter is only possible on request.<br>• This Track 48V luminaire can not be used in the upper part of a Pista Track 48V Profile Suspended Up/Down.<br>• This is not a complete product. Pista track 48V system required. |

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2024-01-04, 02:48:23 PM - ©Modular Lighting Instruments

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2024-01-04, 02:48:23 PM - ©Modular Lighting Instruments

## *TM30 & CRI diagram*

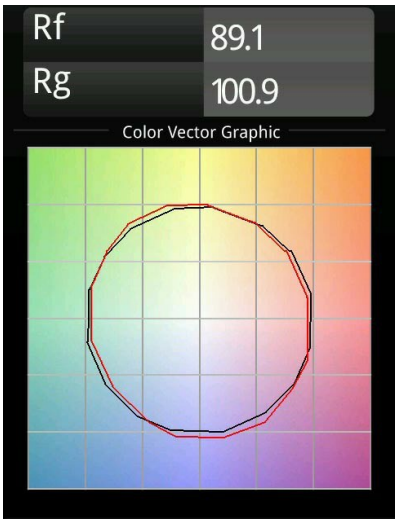

## *Light distribution & beam diagram*

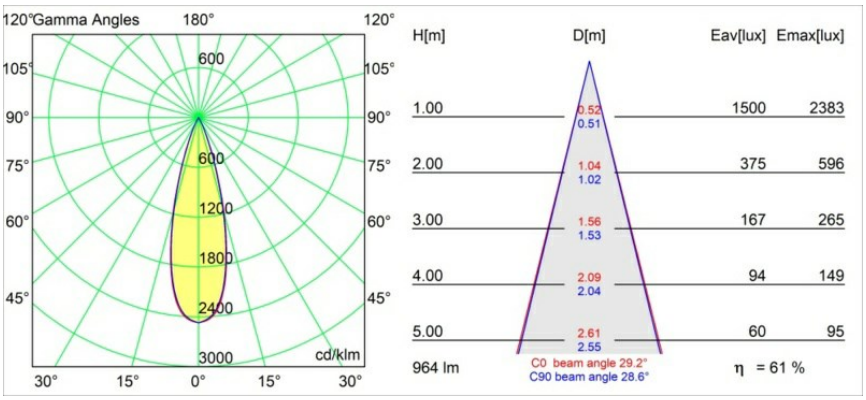


Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly
Latest datasheet and documentation available on www.supermodular.com - 2024-01-04, 02:48:23 PM - ©Modular Lighting Instruments